查询KV1400供应商

VARIABLE CAPACITANCE DIODE

FEATURES

- **Excellent Linearity (CV Curve)**
- **Large Capacitance Ratio (A = 2.10 minimum) with Very Low Series Resistance**
- **Two Diodes in a Miniature Package (SOT23-3)**
- **Very Small Capacitance Deviation at Tape/Reel**

APPLICATIONS

- **FM Electronic Tuning**
- **Voltage Controlled Oscillator**

DESCRIPTION

The KV1400 is an 8 volt range variable capacitance diode designed for FM tuner applications. It contains two elements housed in the miniature SOT23-3 surface mount package.

CLASSIFICATION

(Unit: pF)

C \ RANK		1	2	3	4	5
C_2	MIN	69.13	71.08	73.09	75.15	77.27
	MAX	71.23	73.24	75.30	77.43	79.61

KV1400



ORDERING INFORMATION

KV1400 □□

Tape/Reel Code

TAPE/REEL CODE
TL: Tape Left

ABSOLUTE MAXIMUM RATINGS

Reverse Voltage 18V
Forward Current ..... 50 mA
Power Dissipation ..... 100 mW
Storage Temperature Range ..... -55 to +150 °C
Operating Temperature Range ..... -55 to +85 °C
Lead Soldering Temperature (10 s) ..... 235 °C

ELECTRICAL CHARACTERISTICS

Test conditions: T_A = 25 °C

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{REV}	Reverse Voltage	I_{REV} = 10 µA	17			V
I_{REV}	Reverse Current	V_{REV} = 15.0 V			10	nA
C_2	Diode Capacitance 2	V_{REV} = 2.0 V, f = 1 MHz	69.13	74.37	79.61	pF
C_3	Diode Capacitance 3	V_{REV} = 3.0 V, f = 1 MHz	57.71		64.63	pF
C_6	Diode Capacitance 6	V_{REV} = 6.0 V, f = 1 MHz	33.56		39.18	pF
C_8	Diode Capacitance 8	V_{REV} = 8.0 V, f = 1 MHz	23.38		27.29	pF
R_S	Series Resistance	V_{REV} = 3.0 V, f = 100 MHz		0.3	0.5	Ω
A	Capacitance Ratio	C_3 / C_8	2.10	2.35	2.60	

Note 1: Diode Capacitance measured with HP 4279A or equivalent instruments (at OSC level 20 mVrms, ± 5 mVrms).
Note 2: Series Resistance measured with HP 4191A or equivalent instruments.
Note 3: The tolerance of two adjacent parts on a reel is within 3% at C2, C3, C6, and C8.
Note 4: The value of capacitance is the average of 2 back to back type diodes.

TYPICAL PERFORMANCE CHARACTERISTICS

CAPACITANCE vs. REVERSE VOLTAGE

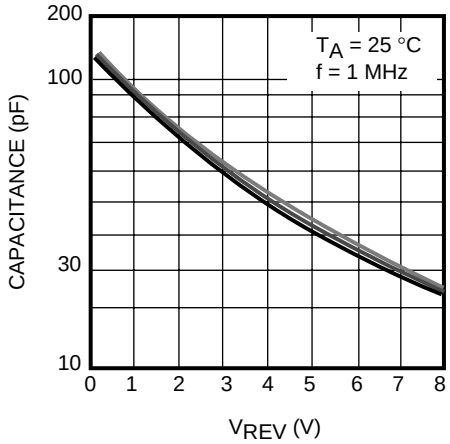

REVERSE CURRENT vs. REVERSE VOLTAGE

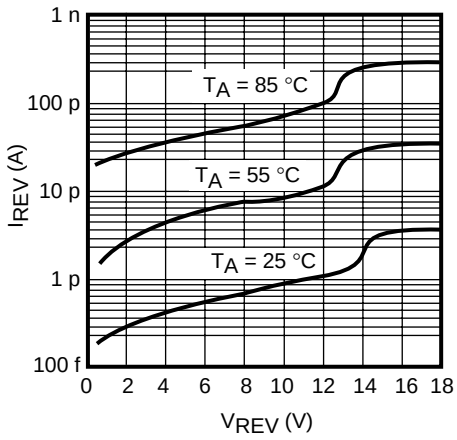

QUALITY FACTOR vs. REVERSE VOLTAGE

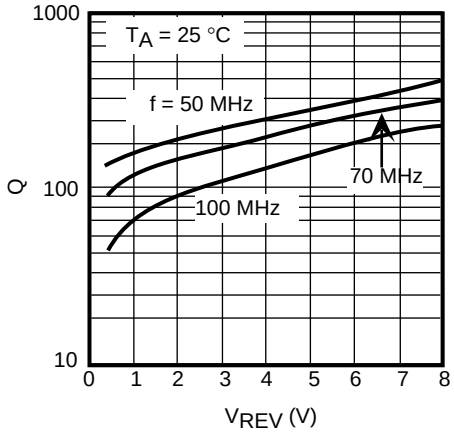

SERIES RESISTANCE vs. FREQUENCY

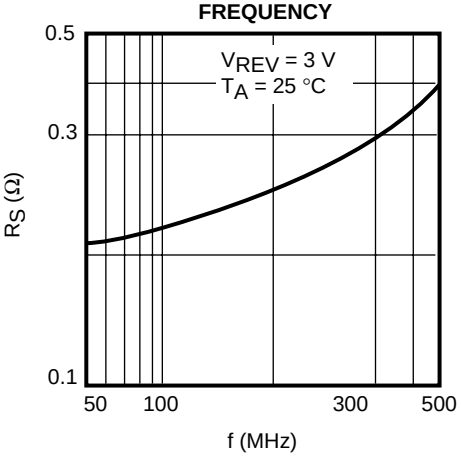

$\frac{C\ (T_A)}{C\ (25\ °C)}$ vs. REVERSE VOLTAGE

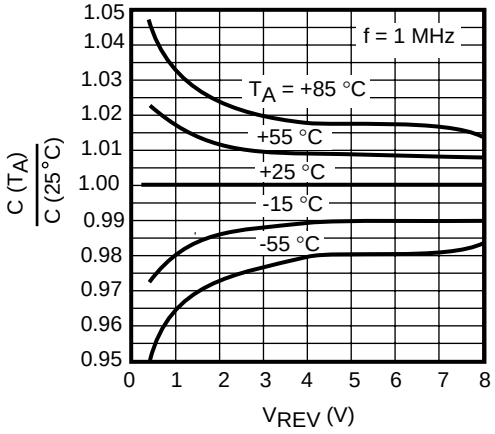

TEMPERATURE COEFFICIENT vs. REVERSE VOLTAGE

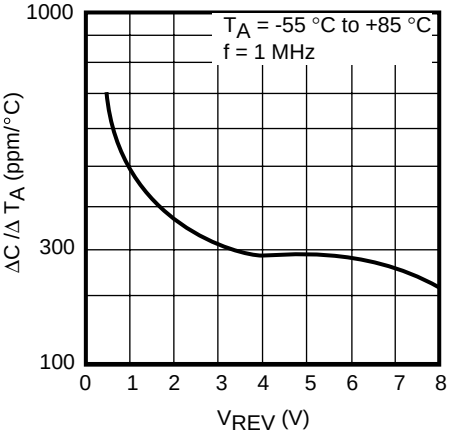

PACKAGE OUTLINE

SOT23-3

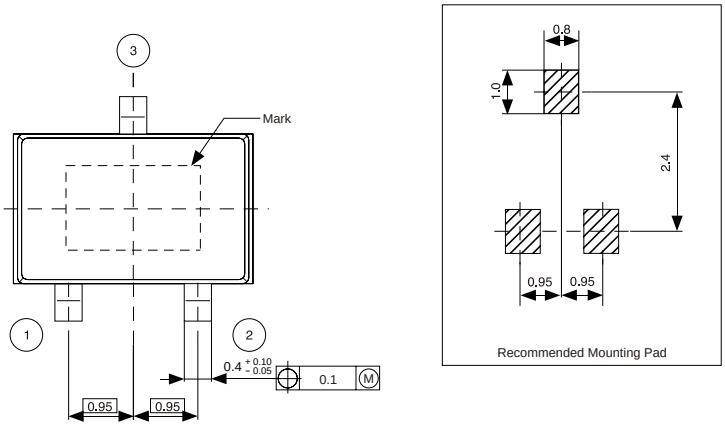



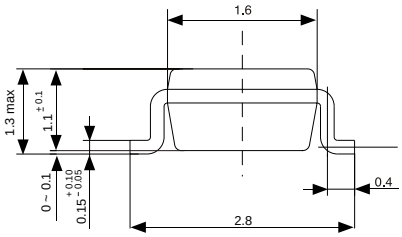

Dimensions are shown in millimeters
Tolerance: x.x = ± 0.2 mm (unless otherwise specified)

Marking Information

Product Code	F0

TOKO

Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street , Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Eastern Regional Office
Toko America, Inc.
107 Mill Plain Road
Danbury, CT 06811
Tel: (203) 748-6871
Fax: (203) 797-1223

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at http://www.tokoam.com

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.

© 1999 Toko, Inc.
All Rights Reserved
IC-xxx-KV1471E
0798O0.0K
Printed in the USA